

# TWIG One Ex

## Lone worker alarm for ATEX areas



TWIG One Ex is an intrinsically safe personal alarm device designed to protect lone workers in explosive hazardous areas. It is equipped with the essential lone worker protection functions, a powerful loudspeaker, preprogrammable device keys and a configurable user interface. The device functionalities can be extended with compatible TWIG Point cloud services and TWIG short range devices.

### Lone worker protection functions

- Automatic Mandown detection on tilt, non-motion and fall
- Device and server based Amber alert
- Distinct and tactile SOS key for emergency situations
- 2-way hands-free voice calls
- SOS cycle with preprogrammable phone numbers
- Tracking and locating indoors and outdoors
- Attendance monitoring with NFC tags
- 4 short cut dial keys

### Robust and ergonomic

- User Interface with configurable menu and function keys
- Slim, light and user-friendly
- Easy to wear with belt clip
- Robust nano SIM card tray

### ATEX/IECEx approved

- II 2 G Ex ib IIC T4 Gb
- II 2 D Ex ib IIC T130°C Db
- Ta: -20°C...+60°C\*\*\*\*
- EESF 20 ATEX 045X / IECEx EESF 19.0020X



### Effective communication in emergency

- 2G/3G/4G\*
- Interactive on-screen messages
- Preprogrammed one-touch status messages
- One-touch voice calls
- Powerful speakerphone
- VoIP calls and data transfer via Wi-Fi\*
- Powerful vibrator and loudspeaker

### Hybrid indoor / outdoor location

- Satellite positioning with 3-constellation GNSS
- TWIG Point AGNSS service for faster location fix
- Hybrid indoor location with TWIG SRD, Wi-Fi and Bluetooth Low Energy (BLE) beacons (SRD3 device option)
- Hybrid location with cellular network + public available Wi-Fi base stations
- Hybrid location with on site TWIG SRD beacons + Wi-Fi base stations + BLE beacons

### Remote device management

- Saves time and money in customer support
- Firmware over the air (FOTA)
- Remote device configuration
- Access with TWIG Point SP web account

### Lone worker safety

Duty of care requires employers to give lone workers means to alert help. Depending on risk assessment, a dedicated alarm device may be required. An automatic ManDown alarm is sent when device user falls or is not moving. When entering a risky situation, enhanced monitoring can be requested with Amber alert. In absence of mobile network connection, TWIG One Ex can trigger alert via Wi-Fi\*. Data transfer via WiFi is available only with SRD3 option of latest device versions.

### Scalable for your needs

TWIG One Ex can be widely adjusted to specific needs by selecting only the needed options and functionalities and by configuring it for specific lone worker situations.

With remote configuration possibility TWIG One Ex is fast to deploy and flexible to operate. It is also USB programmable, either manually or from file.

### Configurable UI and keypad

The 4-digit keypad enables fast control of Amber alert and ManDown functions. Configurable menu key and function keys enlarge device deployment options.

### Power for noisy environments

Integrated high-power speaker-phone boosts two-way voice communications. Powerful vibrating alarm and alarm tones help sensing pre-alarms and incoming communications.

### Indoor positioning

In many buildings GNSS satellite signals are blocked and GNSS-computed location is not available at all.

The indoor location is possible with the device option SRD3 enabling the accurate indoor location by using signals from TWIG SRD beacons, Bluetooth Low Energy beacons or Wi-Fi base stations installed in the building.

### Attendance monitoring with NFC

The NFC Reader of TWIG One Ex registers attendance by reading NFC tags.

### Alarms monitoring and tracking

TWIG Integrator Kit resources enable integrating TWIG devices with alarm receiving centre (ARC).

Optionally the TWIG Point Monitor cloud service provides a turn-key solution for alarms monitoring and tracking.

Alarms and reports can also be received on smartphone as SMS including link to web map.

### ATEX/IECEx compliance

TWIG One Ex complies with ATEX standards 60079-0:2018/60079-11:2012 and IECEx standards 60079-0:2017/ 60079-11:2011.\*\*\*

# TWIG One Ex

## Technical Specification (TLP53EU)

### Compatibility and communication

- Communicates with all systems using MPTP (Mobile Phone Telematics Protocol) both SMS and GPRS (IP).
- Tracking and alert messages include information on satellite positioning, TWIG SRD beacons, speed, heading and battery charge.

### Mechanics

- Dimensions: 102,1 mm x 48,9 mm x 24,6 mm
- Weight: 130 g
- Water and dust proof (IP67), shock resistant
- Firm grip with tactile silicone keypad

### Key telematics functions

- Manual alert through SOS key
- Mandown alarm with 4 automatic alert triggers: device orientation, non-motion, free fall and impact
- Two-way voice over 4G/3G/GSM/Wi-Fi with speaker
- VoIP calls and data transfer via Wi-Fi\* (VoIP calls via 3rd party application, support only 2.4 GHz Wi-Fi network)
- Device and user status messages
- Interactive on-screen messages
- GNSS satellite positioning
- TWIG Beacon SRD / Wi-Fi / BLE location\*
- Geofence

### Key technical features

- GSM: 900/1800 MHz
- WCDMA: Bd.1 (2100MHz)/Bd.3 (1800MHz)/Bd.5 (850MHz)/Bd.8 (900MHz)
- LTE-FDD: Bd.1 (2100MHz)/Bd.3 (1800MHz)/Bd.5 (850MHz)/Bd.7 (2600MHz)/Bd.8 (900MHz)/Bd.20 (800MHz)/Bd.28 (700MHz)
- LTE-TDD: Bd.38 (2600MHz)/Bd.40 (2300MHz)
- Built-in GSM, SRD\*, GNSS, Wi-Fi\*, BLE\*, NFC\* antennas
- Speakerphone with 2 microphones
- Powerful vibrator

### ATEX/IECEX approved

- II 2 G Ex ib IIC T4 Gb
- II 2 D Ex ib IIC T130°C Db
- Ta: -20°C...+60°C\*\*\*\*
- EESF 20 ATEX 045X / IECEX EESF 19.0020X

### Provisioning and security

- Remote or local configuration
- Authorisation of remote and local access
- SSL/TLS secured server connection
- NOTE! Programming allowed only with TWIG Ex USB cable of device type FME92EU.

### Operating time and temperature

- Rechargeable 1350 mAh Li-ion battery
- Typical operating times, GNSS satellite positioning/cellular data reporting\*\*
- 9 days (1 report / hr)
- 5 days (1 report / 10 min)
- 33 hours (1 report / min)
- 10 hours (1 report / 5 sec)
- Up to 12 days (cellular network standby)
- Recharging time\*\*\* < 4 hrs for 95 %
- NOTE! Charging allowed only with TWIG Ex charger of device type CME92EU (or with USB cable FME92EU).
- Operating temperature -20°C ...+60°C\*\*\*\*

### Satellite positioning system

- High performance multi constellation GNSS receiver (GPS, Glonass and Galileo)
- Time to first fix: warm start <10 s; cold start < 35 s
- Configurable opt-out and roaming block
- Extended ephemeris on-board generation
- Motion based GNSS control

### TWIG Point cloud services

- Remote Configurator for device settings management over the air
- Hybrid location service for public space location (cellular + Wi-Fi) and for on-site location (TWIG SRD + Wi-Fi + BLE)
- AGNSS for faster GNSS location
- Alarms monitoring and tracking
- Site planning and management

### Display and keys

- Alterable SOS key colour
- LCD display with guiding symbols
- Preprogrammable function keys and menu key
- 4 numeric keys for answer / assistance call
- Dedicated keys for Amber alert and ManDown alarm functions

### Standard sales package

- TWIG One Ex personal alarm device including integral battery, GNSS satellite positioning and mandown alarm functions
- TWIG Ex USB cable and TWIG Ex charger with adapter of choice (AU/EU/UK)
- User and safety documents

### Optional device features


- 2G/3G/4G mobile network\*
- Wi-Fi only (without mobile network)\*
- SRD3\* for device compatibility with TWIG short range devices (SRD), VoIP calls and data transfer via Wi-Fi (only latest device versions of TLP53EU) and location and BLE beacons
- NFC\* Reader 13.56 MHz

### Accessories

- Charging and programming stations
  - Alterable SOS key colours
  - Belt clip
  - Ex carrying case
  - Car charger
  - TWIG Beacon Ex SRD\*
- Non-ATEX SRD devices:
- TWIG Beacon SRD\*
  - TWIG Remote Button SRD\*
  - TWIG Door Sensor SRD\*
  - TWIG Mandown Button SRD\*

### Software and resources

- TWIG Configurator PC app
- TWIG FirmwareLoader PC app, FOTA
- TWIG Integrator Kit for ARC integration

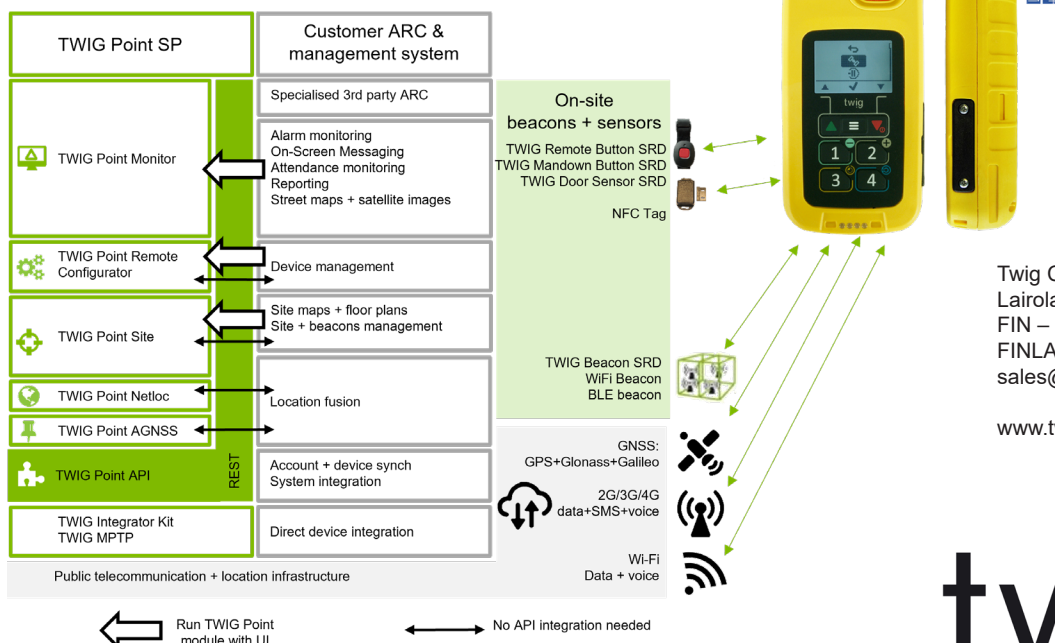

Twig Com Ltd.  
Lairiolantie 14  
FIN – 24910 SALO  
FINLAND  
sales@twigcom.com

www.twigcom.com

twig

Product images are indicative only. Twig Com reserves right to change all information without prior notice. Communication is only possible within mobile network coverage. \*Optional device feature. VoIP calls via TWIG Point from device to device or to VoIP Client. VoIP calls to normal phone numbers via 3rd party services. \*\*Operating times may vary substantially depending on environment. \*\*\*Charging only above 0°C and below +45°C. \*\*\*\*The recommended usage temperature is above -10°C and below +50°C. TWIG is a registered trade mark of Twig Com Ltd. More information: www.twigcom.com